



HYDROTAP G5 BCHA20 4-IN-1 CLASSIC PLUS TAP WITH CUBE MIXER BRUSHED GOLD



BOILING



CHILLED



HOT & AMBIENT

FILTERED

UNFILTERED

Order Code H55921Z07AU

Zip HydroTap Classic Plus 4 in 1 Boiling, Chilled, Filtered water plus Hot and Cold washing up water from two separate taps. The system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including 2 boiling water safety modes, 3 energy saving modes including ON/OFF timers and sensor activated 'sleep when it's dark', 'Quiet' mode with automated intelligent fan speed adjustment, SteriTouch® antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, and 0.2 micron water filtration.



Manufacturing Code H55921Z07AU

Capacity Commercial

Boiling Cups per hour 100

Chilled Cups per hour 75

Tap Zip HydroTap CLASSIC PLUS Tap (Brushed Gold)

Water Pressure Min 300kPa - Max 700kPa

Water Connection 1/2" BSP (G1/2)

Water Supply Requirements Cold

Water Valves Integrated 500kPa Pressure limiting valve and Dual Check Valve

Power Rating 1.9kW 220-240V 50Hz

Power Supply 1 x 10 Amp socket outlet









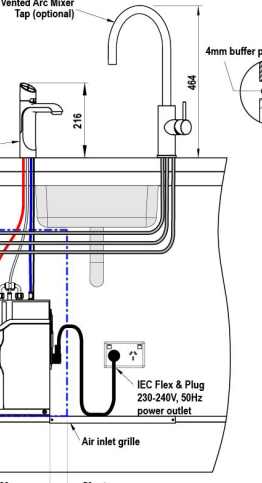
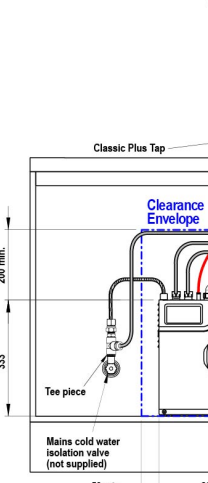
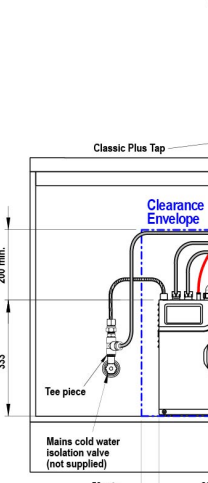

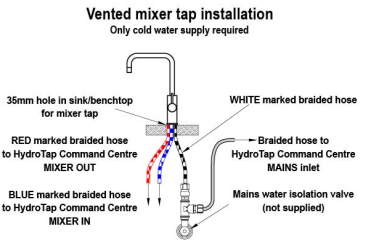
Dimensions W280mm x D455mm x H333mm

Installation Requirements

'1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations. 2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product. 3. HydroTap is air-cooled so discrete cabinetry cut-outs are required for ventilation. 4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service. 5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit. 6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com'

Installation Detail

BKL2 HydroTap G5 v1 01 03 21 BC BC20

<p>Ventilation requirements <small>Contact your local service provider if ventilation is not suitable</small></p> <p>Clearance envelope Position the Tap and the Command Centre as close together as possible.</p>  <p>Tap Positioning Position the Tap to dispense into the sink, allowing clearance for a cup or teapot. Alternatively, mount the HydroTap on a Font (available as an accessory).</p> 	<p>HydroTap Tap options</p>  <p>Tap Positioning Position the Tap to dispense into the sink, allowing clearance for a cup or teapot. Alternatively, mount the HydroTap on a Font (available as an accessory).</p> 	<p>Mixer Tap options</p> <p>Arc Mixer Tap</p>  <p>Cube Mixer Tap</p>  <p>Classic Mixer Tap</p>  <p>Accessible Mixer Tap</p> 
<p>Vented Arc Mixer Tap (optional)</p>  <p>Classic Plus Tap</p>  <p>Clearance Envelope</p>  <p>Mains cold water isolation valve (not supplied)</p> <p>Air inlet grille</p> <p>IEC Flex & Plug 230-240V, 50Hz power outlet</p> <p>Tee piece</p> <p>50 min. 280 50 min.</p>	<p>Tap Positioning Position the Tap to dispense into the sink, allowing clearance for a cup or teapot. Alternatively, mount the HydroTap on a Font (available as an accessory).</p> 	<p>Vented mixer tap installation Only cold water supply required</p>  <p>35mm hole in sink/benchtop for mixer tap</p> <p>RED marked braided hose to HydroTap Command Centre MIXER OUT</p> <p>WHITE marked braided hose to HydroTap Command Centre MAINS inlet</p> <p>BLUE marked braided hose to HydroTap Command Centre MIXER IN</p> <p>Mains water isolation valve (not supplied)</p>

SCALE 1:5
ALL DIMENSIONS IN MM UNLESS OTHERWISE SPECIFIED. INSTALLATION DIAGRAMS ARE FOR ILLUSTRATIVE PURPOSES ONLY. HOSES ARE NOT SHOWN TO SCALE AND CANNOT BE LENGTHENED.

**HydroTap G5
BC20 H**

shown with "Classic Plus" Tap and Arc Mixer Tap (V)

