



HYDROTAP G5 BCHA40 CELSIUS ALL-IN-ONE ARC BRUSHED ROSE GOLD



BOILING



CHILLED



HOT & AMBIENT

FILTERED

UNFILTERED



Order Code H57703Z05AU

Zip HydroTap Design Range CELSIUS All-In-One Boiling & Chilled Filtered water, plus Hot and Cold washing up water from a single tap. The system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including boiling water safety mode, 2 energy saving modes including ON/OFF timers and 2 hour sleep mode, 'Quiet' mode with automated intelligent fan speed adjustment, SteriTouch® antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, and 0.2 micron water filtration. Easy to install integrated ventilation tray included.

Manufacturing Code H57703Z05AU

Capacity Commercial

Boiling Cups per hour 160

Chilled Cups per hour 125

Tap Zip HydroTap Design Range CELSIUS All-In-One ARC Tap (Brushed Rose Gold)

Water Pressure Min 170kPa - Max 700kPa

Water Connection 1/2" BSP (G1/2)

Water Supply Requirements Cold and Hot

Water Valves Integrated 500kPa Pressure limiting valve and Dual Check Valve

Power Rating 1.97kW 220-240V 50Hz

Power Supply 1 x 10 Amp socket outlet


Dimensions W395mm x D464mm x H333mm

Installation Requirements


1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations. 2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product. 3. HydroTap is air-cooled so discrete cabinetry cut-outs are required for ventilation. 4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service. 5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit. 6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com

Installation Detail

EKL2 HydroTap G5 v1.00 02.21 BC40 BC60

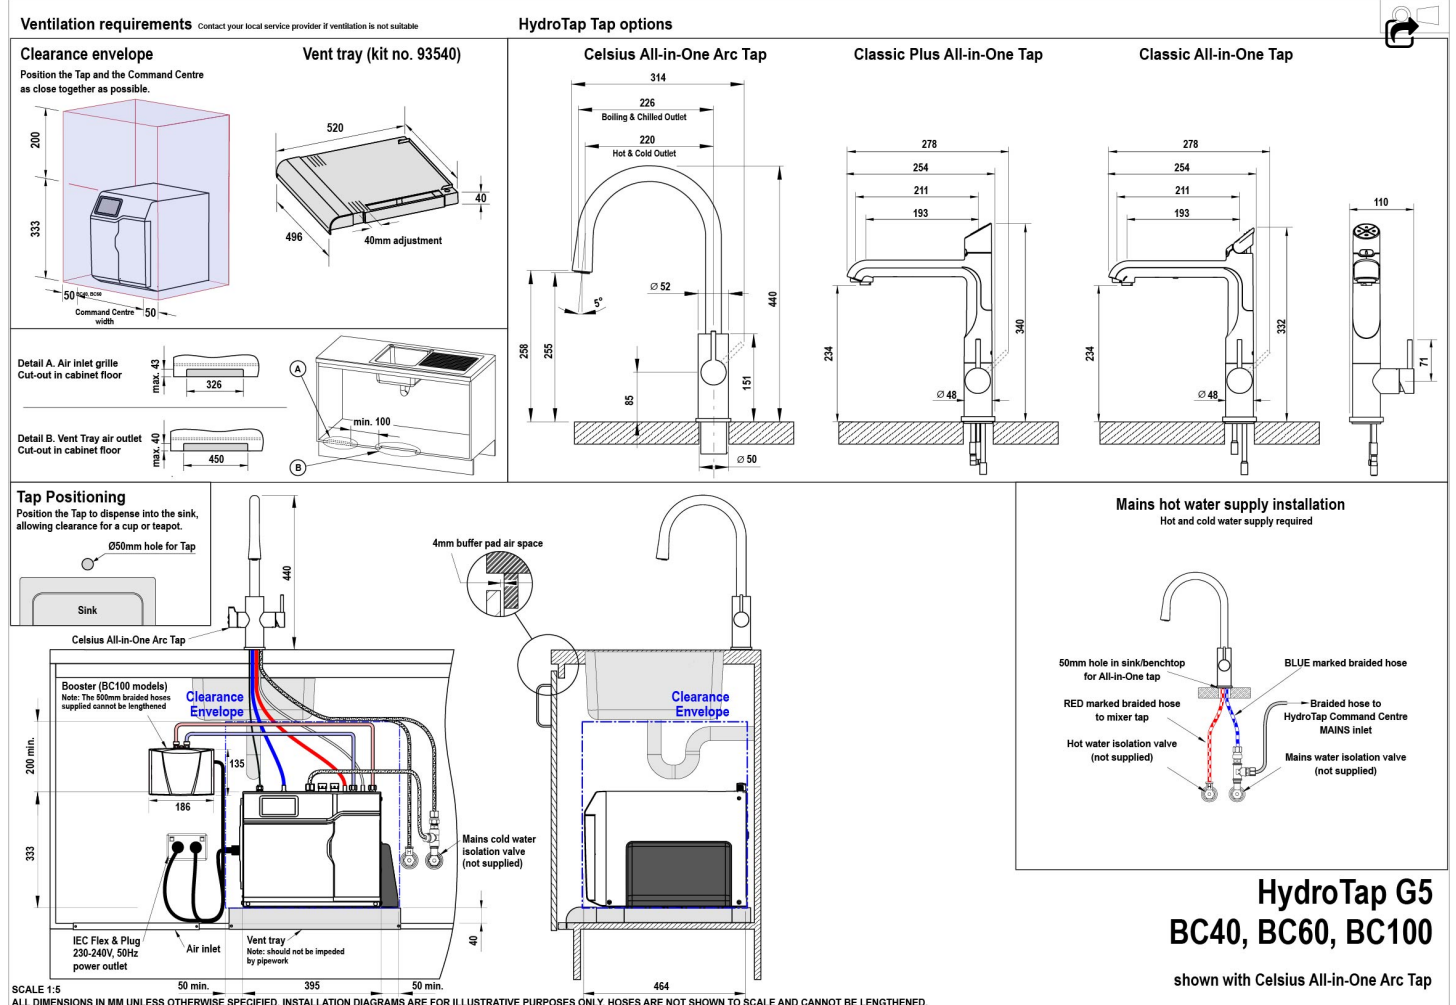

Tap Detail

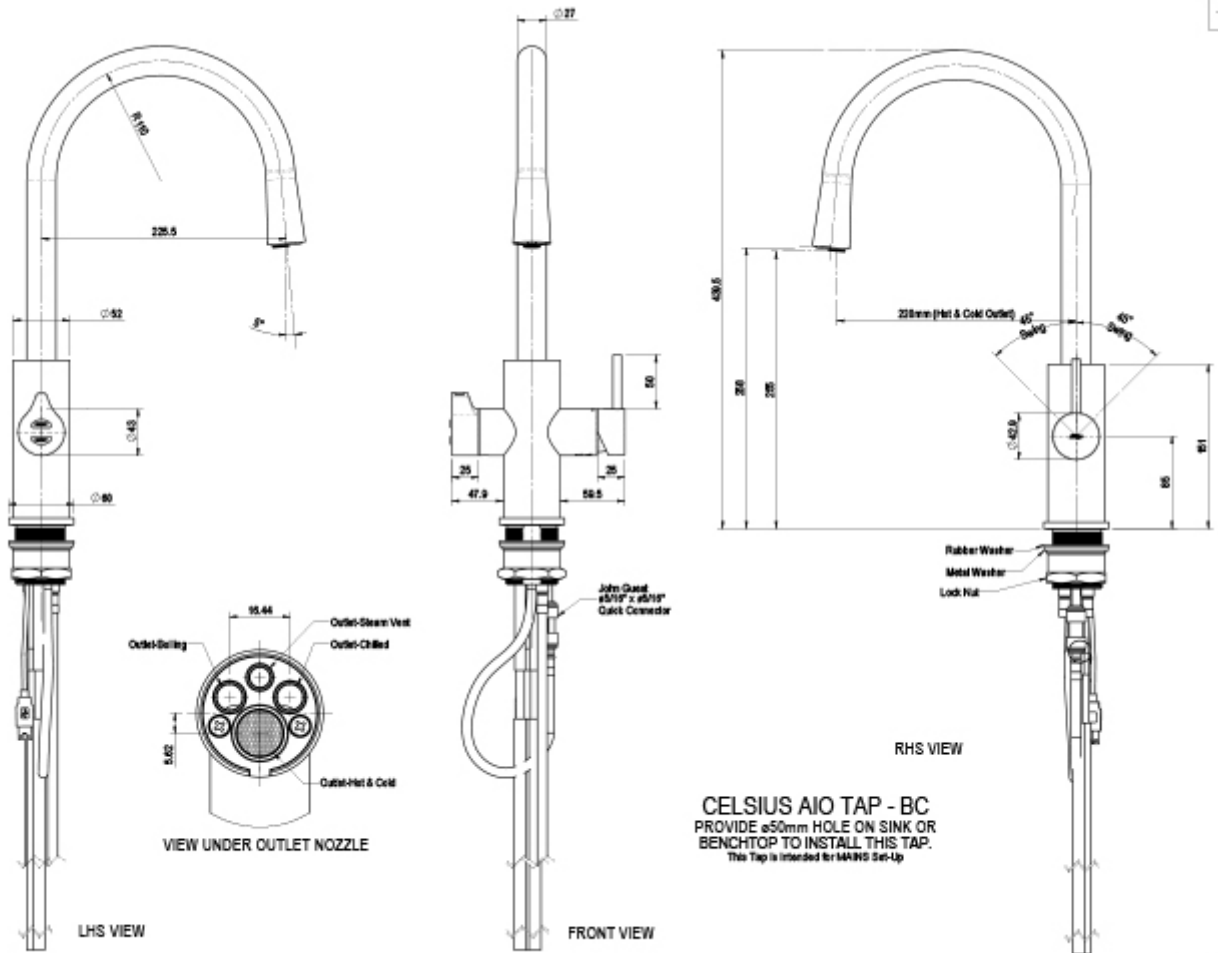

CELSIUS AIO TAP - BC
 PROVIDE ø50mm HOLE ON SINK OR
 BENCHTOP TO INSTALL THIS TAP.
 This Tap is intended for MAINS Set-Up

804680

