



HYDROTAP G5 BCHA20 CELSIUS ALL-IN-ONE ARC BRUSHED ROSE GOLD



BOILING



CHILLED



HOT & AMBIENT

FILTERED

UNFILTERED



Order Code H57702Z05AU

Zip HydroTap Design Range CELSIUS All-In-One Boiling & Chilled Filtered water, plus Hot and Cold washing up water from a single tap. The system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including boiling water safety mode, 2 energy saving modes including ON/OFF timers and 2 hour sleep mode, 'Quiet' mode with automated intelligent fan speed adjustment, SteriTouch® antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, and 0.2 micron water filtration.

Manufacturing Code H57702Z05AU

Capacity Commercial

Boiling Cups per hour 100

Chilled Cups per hour 75

Tap Zip HydroTap Design Range CELSIUS All-In-One ARC Tap (Brushed Rose Gold)

Water Pressure Min 170kPa - Max 700kPa

Water Connection 1/2" BSP (G1/2)

Water Supply Requirements Cold and Hot

Water Valves Integrated 500kPa Pressure limiting valve and Dual Check Valve

Power Rating 1.9kW 220-240V 50Hz

Power Supply 1 x 10 Amp socket outlet

Dimensions W280mm x D455mm x H333mm

Product Approvals

WaterMark, RCM, ARC

WELS Rating

5 Star, 5.5 litres

Warranty


5 years (appliance warranty 36 months plus additional 24 months tank warranty)

Installation Requirements


1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations. 2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product. 3. HydroTap is air-cooled so discrete cabinetry cut-outs are required for ventilation. 4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service. 5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit. 6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com

Installation Detail

BKL2 HydroTap G5 v1.00.02.21 BC BC20

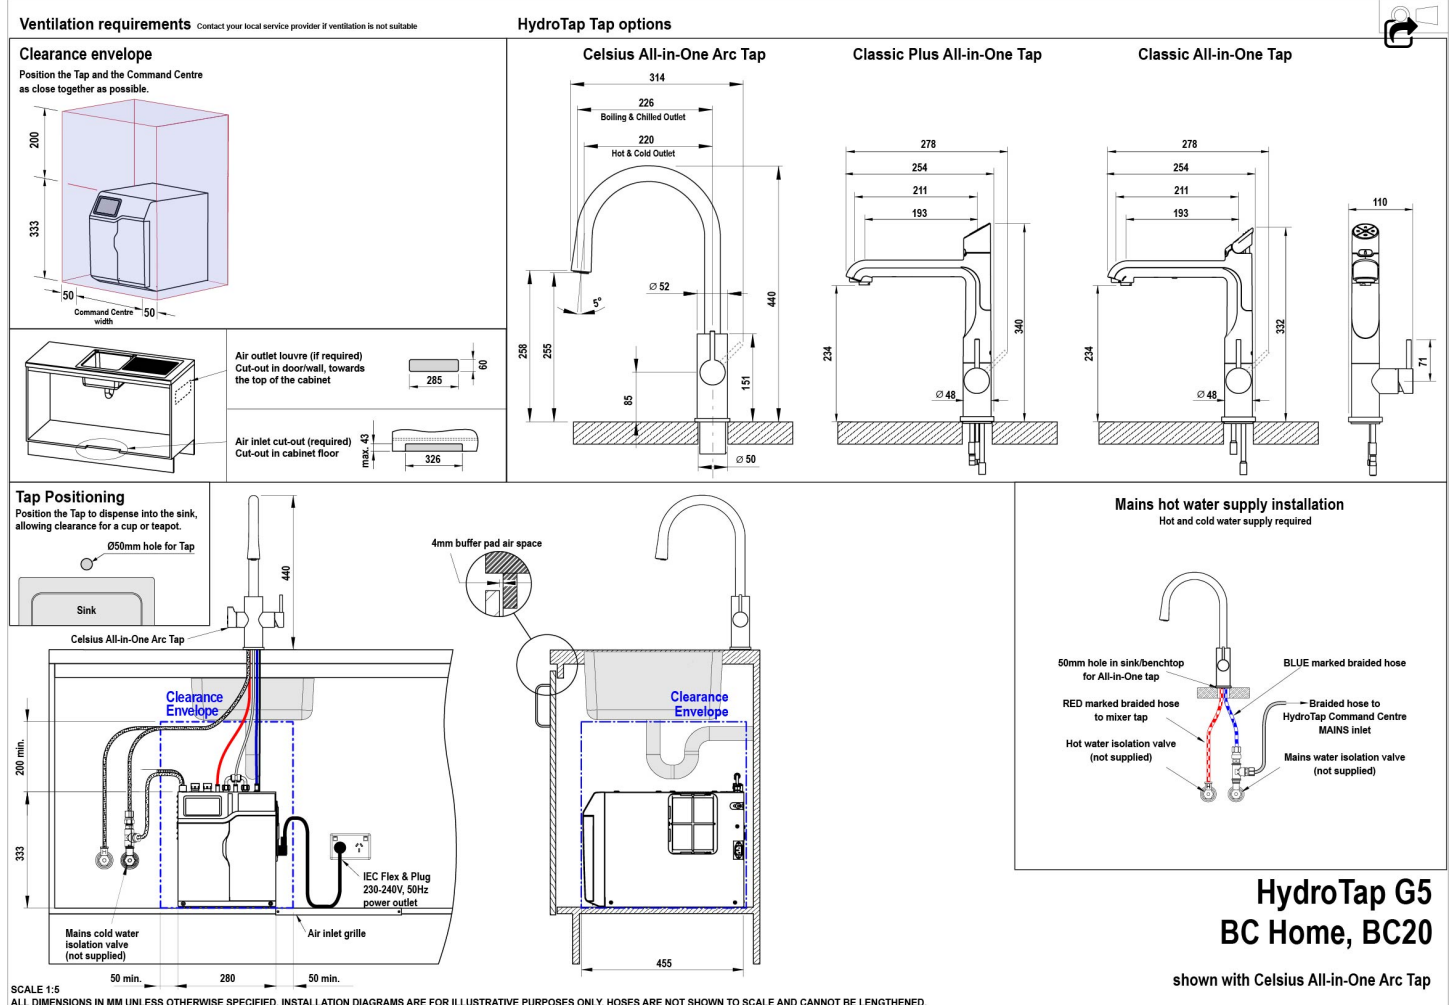

Tap Detail

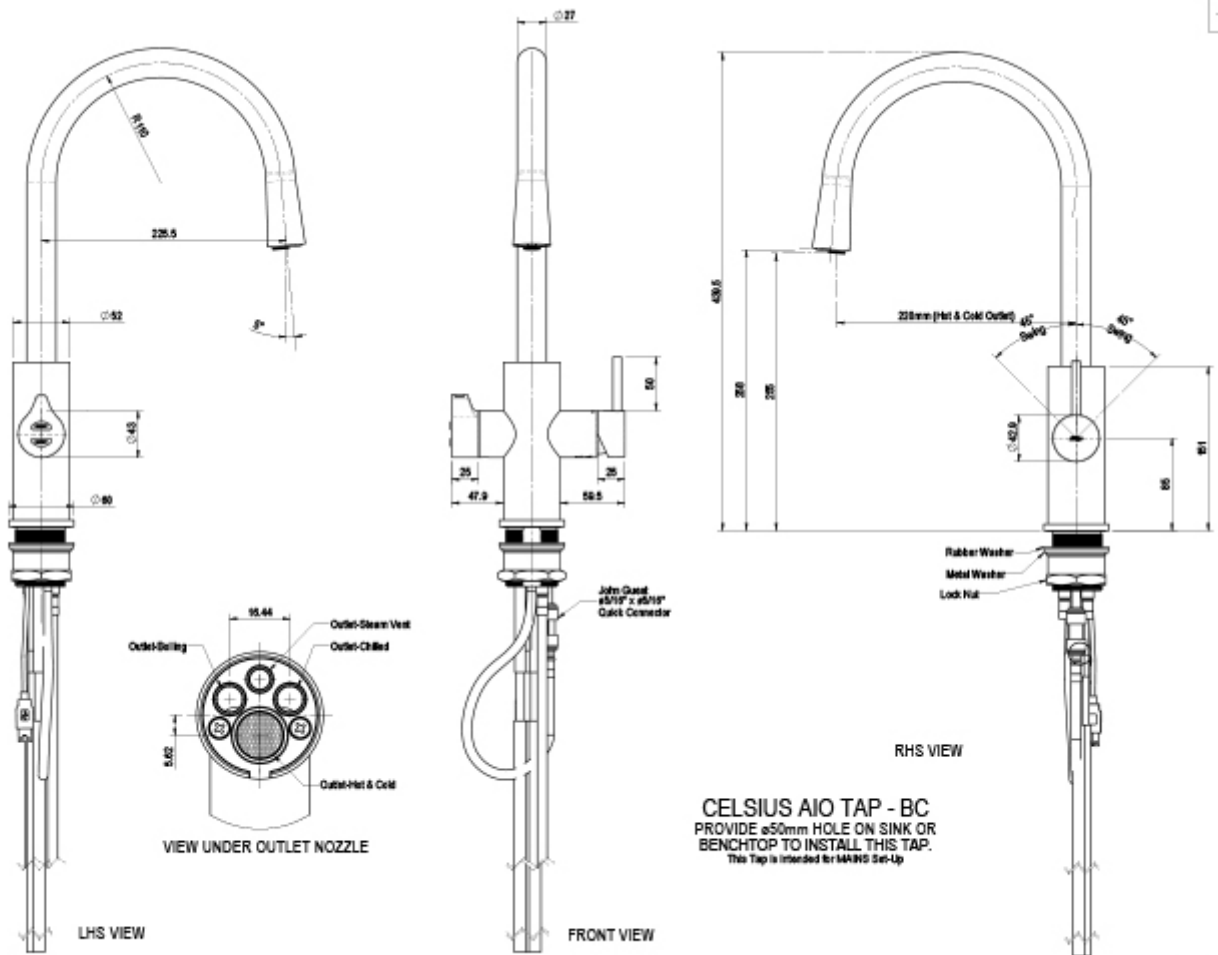

CELSIUS AIO TAP - BC
 PROVIDE $\varnothing 50$ mm HOLE ON SINK OR
 BENCHTOP TO INSTALL THIS TAP.
 This Tap is Intended for MAINS Set-Up

804680

