

ZIP HYDROTAP CELSIUS ALL-IN-ONE ARC BCHA 100/75

Order Code MT2773

Zip HydroTap Design Range CELSIUS All-In-One Boiling & Chilled Filtered water, plus Hot and Cold washing up water from a single tap. The appliance features a single under bench command centre including full colour interactive touch screen display with pin code protection, boiling water safety mode, 3 energy saving modes including sensor activated "sleep when its dark" and 0.2 micron water filtration.

Manufacturing Code	X
Capacity	Commercial
Disability Options	Unavailable
Boiling Cups per hour	100
Combined Chilled and Sparkling Cups per hour	75




Water Pressure	Min 250kPa - Max 700kPa				
Water Connection	12.7mm BSP				
Water Supply Requirements	Cold and Hot				
Water Valves	Integrated 500kPa Pressure limiting valve and Dual Check Valve				
Power Rating	2.125kW 220-240V 50/ 60Hz				
Booster Power Rating	n/a				
Power Supply	1 x 10Amp GP0				
Dimensions	H333mm x W394mm x D464mm				
Product Approvals	WaterMark, CE, RCM				
Wels Rating	5 Star, 5.5 litres				
Warranty	5 years (appliance warranty 36 months plus additional 24 months tank warranty)				

Installation Requirements

- 1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.
- 2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1.5 metres of the product.
- 3. HydroTap is air-cooled so discrete cabinetry cut-outs are required for ventilation.
- 4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
- 5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.
- 6. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com

Installation Detail

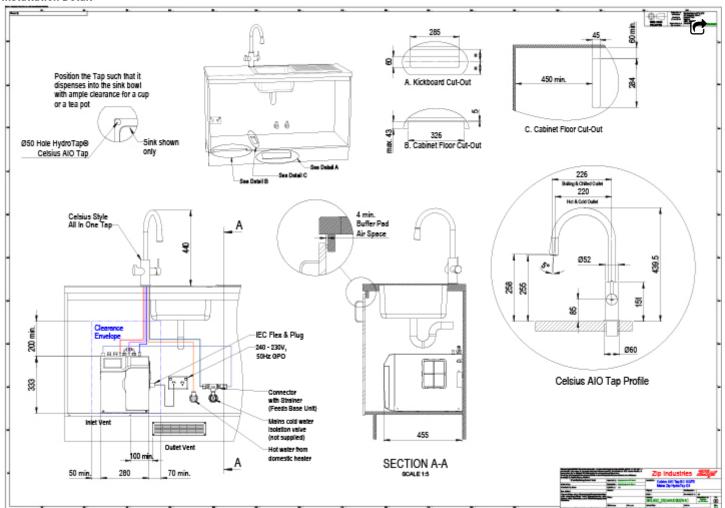

Tap Detail

